

SINKGRAB · PRECIS

SinkGrab design precis

Design Molecule Lab · designmolecule.com

DOCUMENT CONTROL

Document ID	SKG-PRC-001	Version	0.3
Status	Draft	Date	2026-10-03
Author	Amish Chadha	License	CERN-OHL-S-2.0
Project TRL	TRL 3 Proof of concept		
Repository	github.com/BoujeeEnjinia1701/sinkgrab		
Source	docs/02-concept.md @ uncommitted		

REVISION HISTORY

Version	Date	Author	Change
0.3	2026-10-03	Amish Chadha	TRL 3 numbers from SKG-CAL-001 on the constructable design (SKG-DDR-002); concept media from the model
0.2	2026-10-03	Amish Chadha	TRL 2 precis; single closing line with a gravity-opening grab, overload limits, centred scraper pole, doors and saddles (SKG-DDR-001)
0.1	2026-09-30	Amish Chadha	Initial scaffold


SinkGrab design precis

Deepens village wells under water with a rope grab and under-curb scraper, without divers or pumps.

SinkGrab

github.com/BoujeeEnjinia1701/sinkgrab

CONCEPT, NOT FOR FABRICATION

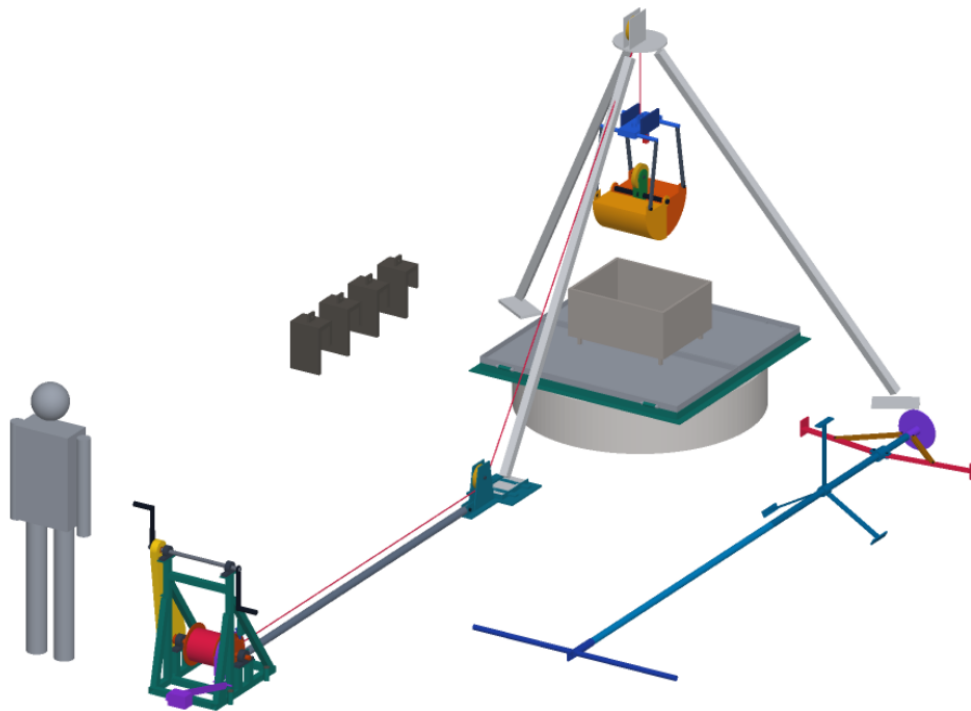

Seen from the front right and above, 24 deg elevation. Grey: HatchSide tripod (shared block, not in this kit), Well collar (site), Spoil tub (bought, line 32), Person, 1.75 m (scale) for scale

Figure 1. SinkGrab at the well head: hand capstan, drawbar and lead cradle on the left, well-head frame with its doors closed, the grab at the dump position over a spoil tub, the scraper and ballast saddles on the ground. The HatchSide tripod is shown in grey. Concept, not for fabrication.

■ Summary

SinkGrab lets a village crew dig the last 3 m of a caisson well under water from the surface. A clamshell grab on one rope digs sand out of the flooded rings, an under-curb scraper on a pole cuts the soil from under the bottom ring so the lining sinks, and a hand capstan worked by two people does the lifting through the HatchSide tripod. On paper it lifts 21 L a bite with 52 N on each crank handle and never loads the tripod past its 150 kg rating; the cycle at 10 m is about 3.7 min, longer than the 3 min target. The parts cost about USD 2,506 against a value-engineering target of USD 4,000.

■ How it works

The crew stands the HatchSide tripod over the well and replaces its winch with SinkGrab's line: an 8 mm rope runs from the hand capstan on the ground, through a lead sheave in a cradle under the tripod's leg A foot, up beside the leg, over the head sheave and straight down the well. A drawbar joins the capstan to the cradle, so the rope pull is carried inside the kit and the tripod sees the same loads as with its own winch.

The grab is lowered closed on the capstan's band brake. On the bottom the crew slacks the line by about 0.3 m: the grab's head settles under its own weight and pushes the two shells open into the sand. Cranking then pulls the crosshead up toward the head through a 2:1 tackle inside the grab, which closes the shells on a bite and lifts it. At the top the crew closes the well-head doors under the grab, lowers it into a spoil tub standing on them and slacks the line again: the shells open and the sand falls into the tub. Cranking closes the empty grab and lifts it off; the doors open and the cycle repeats.

When the centre has been dug about 330 mm below the cutting edge, the scraper goes down on 2 m pole sections. Its foot lands in the sump, the pole's weight slides it down through the foot sleeve, and two struts push two arms out until their toes reach 15 mm beyond the ring's outer face, under the cutting edge. Two people turn the pole with a T-bar through the hole in the closed doors, and the toes cut a ring of soil from under the wall, which the grab then removes. Lifting the pole folds the arms.

Every cycle the crew reads the dip tape at four datum holes on the well-head frame. If one side is ahead, they scrape only on the high side and hang ballast saddles on the high side of the top ring.

■ Main components

Table 1. Components (numbers are bill of materials lines).

#	Component	Role
1 to 7	Hand capstan: frame, winding drum with brake drum and ratchet wheel, pawl, crank shaft with shear pin hub, removable cranks, chain guard, weighted band brake, stakes	Two-person hoist; holds the load at any depth, limits the line pull
8, 9	Foot cradle with lead sheave, and drawbar	Turns the line up leg A; carries the pull back to the capstan
10 to 14	Clamshell grab: head with ballast plates, tie rods, two shells, crosshead with hinge pin and sheave, shear link	Digs and lifts 21 L a bite under water on one line
15 to 17	Under-curb scraper head, 2 m pole sections, T-bar	Cuts the soil from under the ring's cutting edge
18, 19	Well-head frame with datum brackets, folding doors	Covers the shaft, carries the spoil tub, guides the pole, holds the tilt datum
20	Ballast saddles (8)	Add weight on the high side of the top ring
21 to 34	Bought: bearings, chain drive, shear pins, sheaves, ropes, swivel and shackles, dip tape and plumb line, gas detector, spoil tubs, barrier kit, fasteners	

■ Numbers from the TRL 3 calculations

Table 2. First-order numbers (SKG-CAL-001).

Quantity	Value	Assumption or basis
Bite	21.2 L (28.3 L closed)	75 % fill in loose saturated sand
Grab mass	47.9 kg; 93 kg full in air	Sand 2.0 kg/L, 3 L of water
Working line pull	1,006 N	1.1 for hand hoisting
Crank force at rated load	52 N each, two people	4:1 chain, 250 mm cranks, outer layer
Hoist speed	6.0 m/min	50 W per person
Cycle at 10 m	3.7 min (3.1 min with three at the cranks)	Lowering 0.5 m/s on the brake
Crank shear pin	Line limited to 2,107 N	3 mm S235, ±20 %
Shear link	Releases at 1,202 to 1,469 N	Pin break-tested, ±10 %
Tripod	Inside its 150 kg rating and 225 kg proof	HatchSide HTS-CAL-001
Scraper	136 N each on the T-bar; arms fold to 364 mm radius	150 N per toe in loose sand
Sinking	Continues while skin friction is below 1.66 kPa	8-ring string, 8 saddles
Heaviest piece	24.6 kg (scraper head)	Model masses
Parts cost	USD 2,506	Value-engineering target USD 4,000

■ Key design choices

All decided under Amish's pre-approvals of 2026-10-03 (SKG-DDR-001 and SKG-DDR-002).

- **One line does everything.** A two-line grab needs a second winch and two people keeping two ropes in step. SinkGrab's grab is lowered closed and opened by its own head weight, so one capstan and one rope dig, lift and dump.
- **The tripod never sees more than its rating.** A calibrated shear link at the grab's tackle releases between 1.20 and 1.47 kN and opens the grab if it snags; a 3 mm shear pin in the crank hub caps the line at 2.1 kN, under the tripod's proof load, whatever two people do at the cranks.
- **The rope pull stays inside the kit.** The drawbar between the capstan and the cradle under the leg A foot means nothing is anchored to the ground but the tripod's own feet.
- **The brake is on unless someone holds it off.** A weighted lever applies the band brake when it is let go; the cranks come off before any lowering.
- **The scraper is centred and opened by weight.** A pole with a centralizer reaches any depth to 25 m, and its own weight opens the arms only when the foot is on the sump floor.
- **Doors over the shaft.** The well is covered whenever the grab is up; the doors also carry the spoil tub, guide the pole and hold the tilt datum.

■ Patent design-arounds

From the preliminary patent, trademark and prior-art screen (not legal advice):

- Rope grab and scraper only; no sand dredger or suction dredging, to stay clear of CN101787703B (China 22MCC Group, active to about 2030).
- A targeted search of Chinese open-caisson excavator patents for under-curb scraper claims is run before public release (decided, SKG-DDR-001, item 14).
- US1750728A (well-tool grab) is expired and a different tool; no constraint.

■ Relationship to other lab projects

- **HatchSide** provides the tripod. SinkGrab removes the HatchSide winch, fits a 150 mm sheave grooved for its 8 mm line in the HatchSide head, and clamps its cradle under the leg A foot. Nothing in HatchSide is changed.
- **SiltHaul and SaltDrag** share the hand capstan block: the same frame layout, 4:1 chain, shear pin hub and pawl, here with a single drum and a band brake.
- **CalRig** is the first candidate rig for the proof loads.

■ Safety

Safety: SinkGrab is lifting equipment worked over an open well shaft, with a hand-cranked chain drive and loads hanging over the well. The hazards are falls into the shaft, loads or tools falling into the well or onto people, rope or pin failure, fingers and clothing caught in the chain, drum or brake, bad air in the shaft, and rings dropping or tilting suddenly as they are undercut.

- Nobody enters the well while SinkGrab is in use. Any entry for another reason needs a gas test, a harness on a separate line from separate rescue equipment, and a person at the top throughout. SinkGrab's line is never used to lift or lower a person.
- Test the shaft air with the four-gas detector before work starts each day and after any break. Never run a petrol or diesel engine in or near the well mouth.
- The doors are closed whenever the grab is above them and at every stop. A barrier stands 2 m outside the tripod feet.
- Every lifting part is proof-loaded before first use (SKG-BLD-001, section 6). Nobody stands under the grab or beside the line while it is loaded.
- The shear pins are always the specified mild steel pins, never a bolt or a nail.
- The cranks come off before lowering on the brake; the chain guard stays on.
- Stop and correct when tilt passes 1 in 160; stop all undercutting at 1 in 80 until it is corrected.

This design is published as an open engineering reference. It is not certified lifting or well-construction equipment.

■ Open questions

The open questions of SKG-PRB-001 v0.1 were answered on paper at TRL 2 (SKG-DDR-001). What only trials can answer is listed in SKG-PRB-001, "Questions for the first trials". Three requirements await Amish's decision in the design decisions register (SKG-DEC-001): R1, R3 and R4.